





Jalas® EXALTER 9915

EN ISO 20345:2011 S1, P, SRC, HRO ASTM F2413-18 M/I/C SD 35 PR



Learn more

LOW-CUT WITH VENTILATION AND LACES

This low-cut safety shoe has the features you need for most work situations, such as PTC-textile nail protection, toecap in aluminum and high-grip Vibram Nitrile rubber outsole. The midsole and JALAS FX3 Supreme multilayer insole together with the sock-like construction provide ultimate comfort. Poron® XRD™ shock-absorption prevents injuries to foot and back. The upper has net-covered ventilation holes to keep feet cool and prevent particles from entering the shoes.

CHARACTERISTICS

- Excellent shock absorption
- Excellent grip
- Perfect fit
- Extra comfortable
- Very breathable

FUNCTIONS

- Double shock absorption zones
- Conforms with IEC 61340-5-1 (ESD)
- Heat-resistant outsole
- Oil-resistant outsole
- Anti-static properties
- Ergonomically shaped
- Soft
- Specially designed details
- Breathable mesh
- Polstered shaft edge
- Ventilating insole
- Stabilizator
- Free from animal-derived materials





PREVENTS RISK OF

toe injuries, nail penetration, antistatic

PRIMARY ENVIRONMENTS OF USE

outdoors, indoors, environments with risk for outsole penetration, dry environments, clean environments, warm environments

SPECIFICATION

TYPE Safety footwear, Low shoes

NAIL PROTECTION MATERIAL **Plasma-treated composite** (PTC) textile

(FIC) textile

 $\mathsf{FITTING}\ \mathbf{Regular}$

COLLECTION Exalter

UPPER MATERIAL Microfiber, Textile

TOECAP MATERIAL Aluminium

LINING MATERIAL Polyester

INSOLE FX3 Supreme

INNERSOLE MATERIAL Textile, Soft EVA, Rigid EVA,

Polyester-based conductive thread, Neo foam, Double

shock absorption zones in Poron® XRD®

MIDSOLE MATERIAL PU midsole

OUTSOLE MATERIAL Nitrile rubber outsole

FASTENING Laces

COLOUR Black, Green

NET WEIGHT, (SIZE 42) 1,27 kg

COMPLIANCE





EN ISO 20345:2011 S1, P. SRC, HRO

ASTM F2413-18 M/I/C SD 35 PR





FEATURES



Anti-static properties



Ergothan Shock Absorption System



ESD



textile

Nail protection in


plasma-treated

composite (PTC)



Oil-resistant outsole Stabilizator

Heat-resistant
outsole

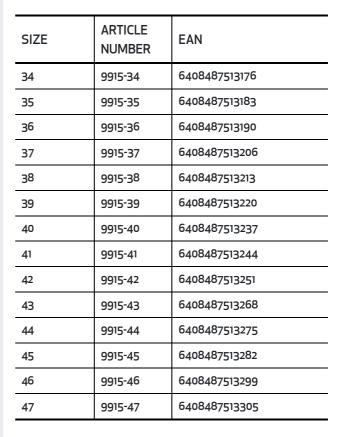



 $Limav\"{a}gen~28, SE-793~32~Leks and, Sweden~Phone~+46~(0)~247~360~00~|~info@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~order@ejendals.com~|~$